


TVS-471U-RP disassembly SOP

1. Remove Top Cover




2. Remove Rear Panel before removing MB

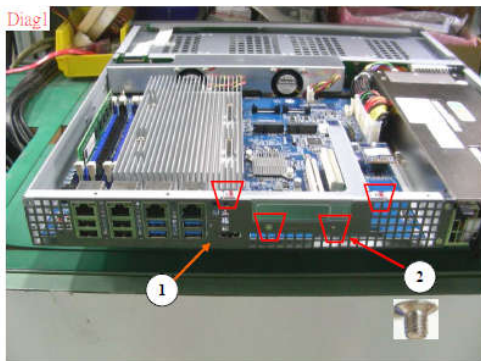

底部

注意COM port不可偏移或內縮於機構裏面


3. Remove FAN Module

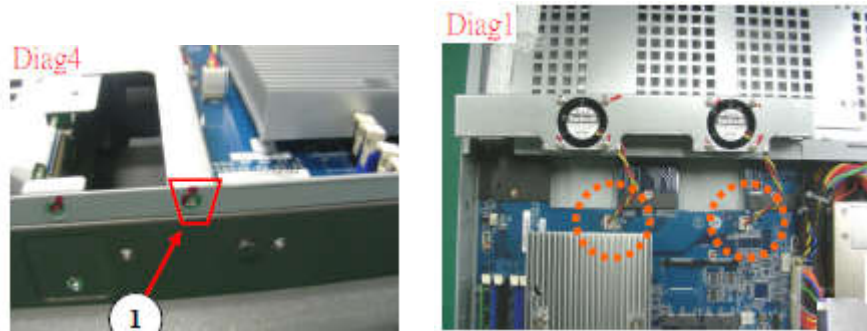

Fan module disassembly



Riser Card Mechanical

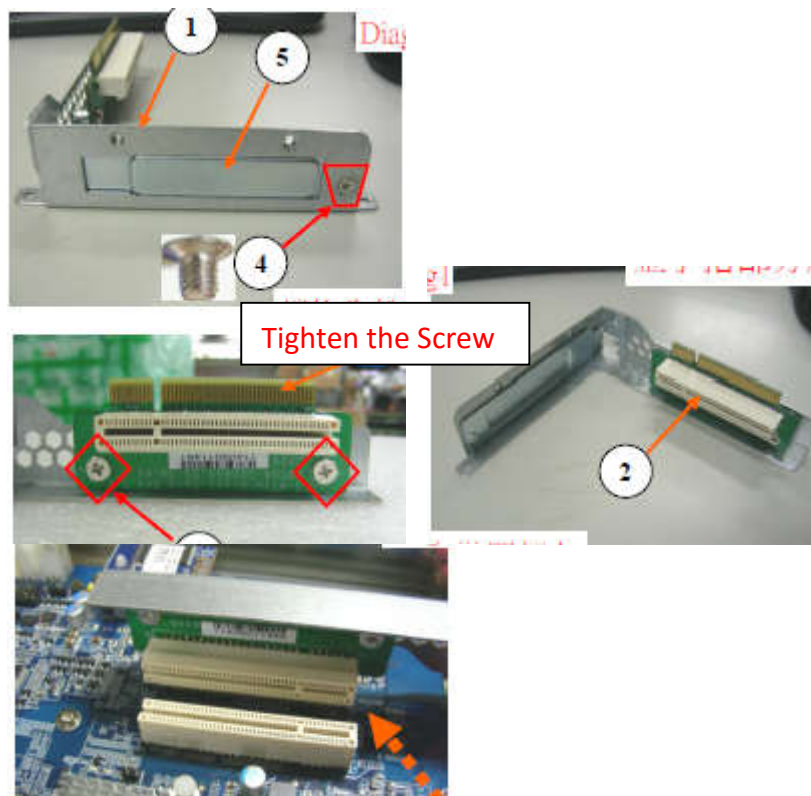



4. Power supply

Remove the cable connections of Power Supply first




Follow the graphics to install cable


The height of the cables should lower than Power Supply module for avoiding squeeze by top cover

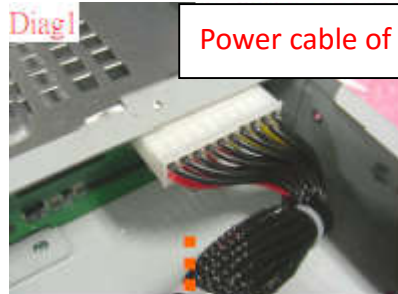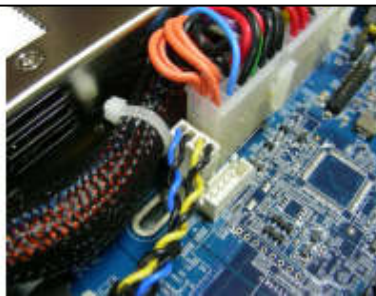


PSU Screw locations

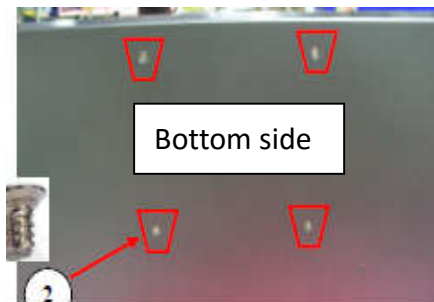

5. Motherboard removal

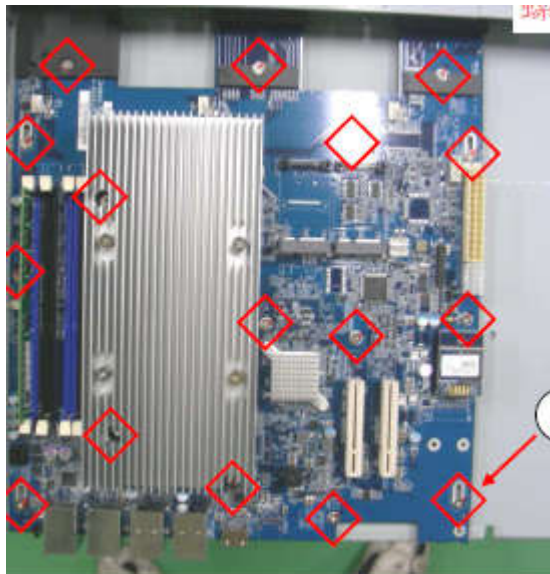


6. Backplane removal

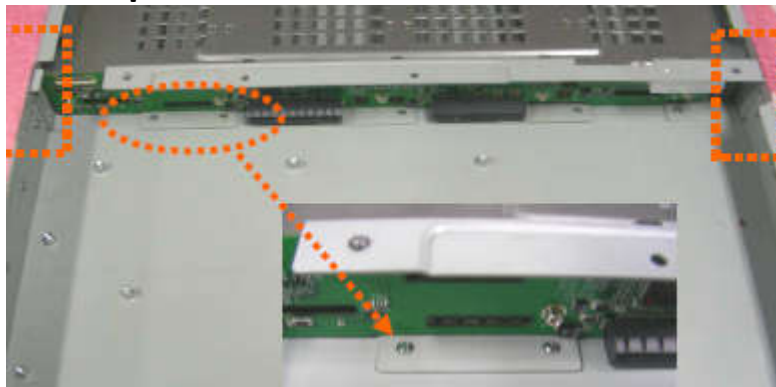


Flexible flat cable is fixed with tape



Screw locations


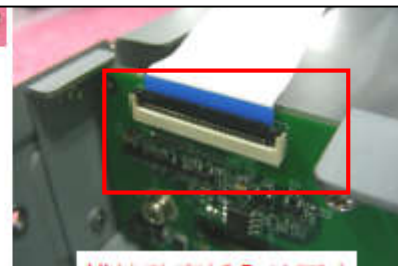


Backplane board screw positions

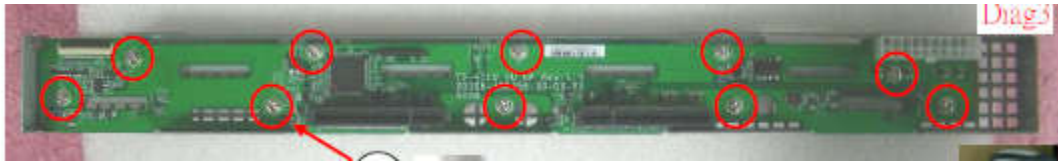


Motherboard components


DOM

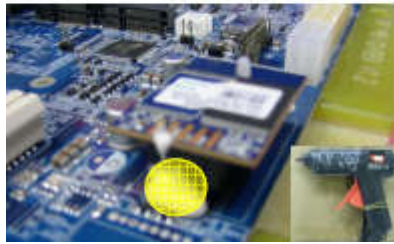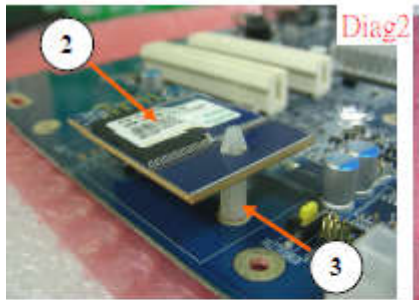

RAM

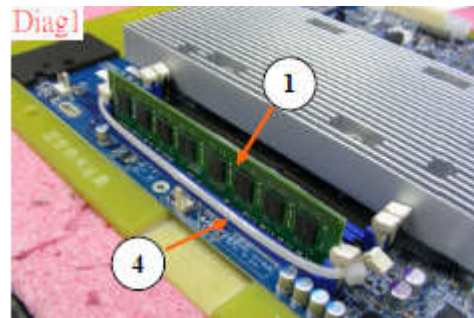

CPU

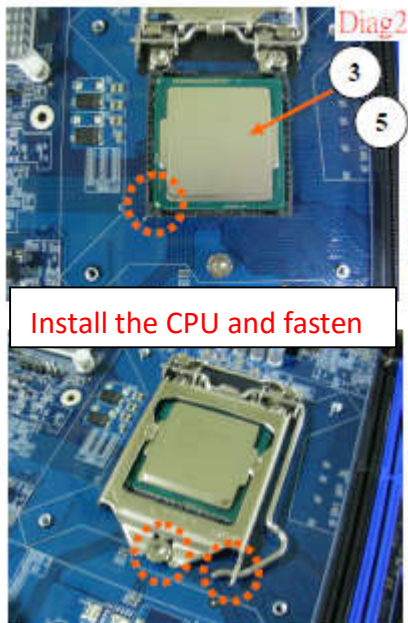

HEATSINK

Fin direction should be parallel to RAM

